


# 6M16

Propulsion Diesel Engine

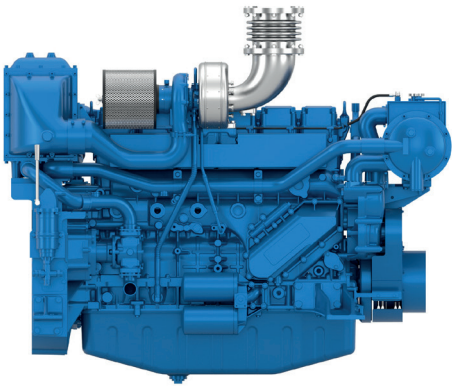

Number of cylinders	6 in line
Bore and stroke (mm)	126 X 130
Total displacement (L)	9.7
Compression ratio	17/1
Engine rotation	counter clockwise
Idle speed	600
Flywheel	SAE 1
Flywheel housing	SAE 14"

### Customer benefits

**Compact size** with one of the best in class power outputs

**Controlled fuel consumption** with low exhaust emissions at any running cycles

**Life cycle cost efficiency** with extended mean time between overhauls

**Easy maintenance** as the engine is equipped with simple mechanical injection


### Rated power - Fuel consumption

Duty	kW	HP	RPM	Fuel consumption			IMO	EPA
				Optimum value		Rated power		
				g/kWh	g/kWh			
P1	240	326	2100	214	218	61	II	-
P2	264	359	2100	206	225	69	II	-

	P1	P2
Application	Unrestricted Continuous	Continuous
Engine load variations	Very Little To None	Continuous
Average Engine load factor	80-100%	30-80%
Annual working time	More Than 5000 H	3000 -5000 H
Time at full load	Unlimited	8h Each 12h

<b>P1 Continuous Duty</b> <ul style="list-style-type: none"> <li>• Deep sea trawlers</li> <li>• Shrimps trawlers</li> <li>• Sea going tug boats</li> <li>• River tug boats</li> <li>• Push boats</li> <li>• Freighters</li> <li>• Dredges</li> <li>• LCT</li> <li>• Ferries</li> </ul>	<b>P2 Heavy Duty</b> <ul style="list-style-type: none"> <li>• Deep sea trawlers</li> <li>• Shrimps trawlers</li> <li>• Sea going tug boats</li> <li>• River tug boats</li> <li>• Push boats</li> <li>• Freighters</li> <li>• Dredges</li> <li>• LCT</li> <li>• Ferries</li> </ul>	<b>P3 Intermittent Duty</b> <ul style="list-style-type: none"> <li>• Seasonal passenger vessels</li> <li>• Fishing boats</li> <li>• Pilot boats</li> <li>• Commercial pleasure boats</li> <li>• Pump boats</li> <li>• Displacement sailboats</li> <li>• Trawlers</li> <li>• Bow thrusters</li> </ul>	<b>P4 Light Duty</b> <ul style="list-style-type: none"> <li>• Private pleasure boats</li> <li>• Multi-hull pleasure boats</li> <li>• Survey or rescue fast vessels</li> <li>• Military fast vessels.</li> </ul>	<b>P5 High performance Duty</b> <ul style="list-style-type: none"> <li>• Private pleasure boats</li> <li>• Multi-hull pleasure boats</li> </ul>
--	---	--	---	---

## Dimensions and dry weight (mm/kg)

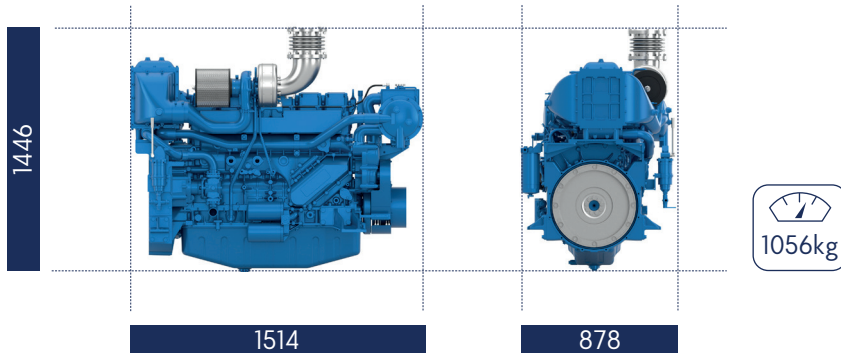

## Standard equipment

### Cooling System

Two - stage cooling circuit with built - in HT thermostatic valve  
Integrated fresh water expansion tank  
High efficiency tubular heat exchanger  
Gear driven centrifugal fresh water pump  
Self priming raw water pump with bronze impeller

### Lubrication System

Full flow lube oil filters duplex type  
Fresh water cooled lube oil heat exchanger

### Fuel System

Common-rail electronic injection  
High pressure pump with shielded high pressure injection rail and pipes  
Fuel oil filter duplex type  
External fuel pre-filter with water separator

### Intake Air and Exhaust System

Double flow raw water cooled intake air heat exchanger module  
High efficiency dry turbocharger with ball bearing technology  
Two Stage Turbocharging system

### Electrical System





Voltage: 24V DC insulated  
Electrical starter  
190A battery alternator

### Optional Equipment


Wet exhaust  
PTO elastic coupling  
Additional pulley  
Electric drain system  
Standard PTO for hydraulic pump  
Different alternators possible - including 12V  
Electrical rotary actuator

## Performance

P1 - 240kW - 326hp @2100rpm

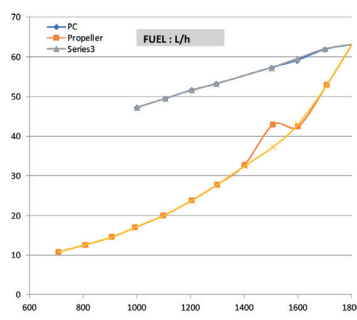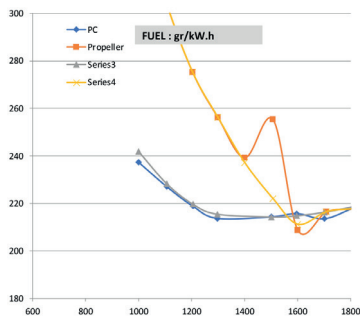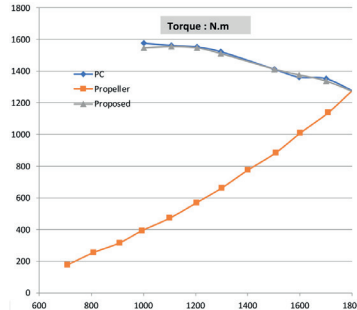

P2 - 264kW - 360hp @2100rpm

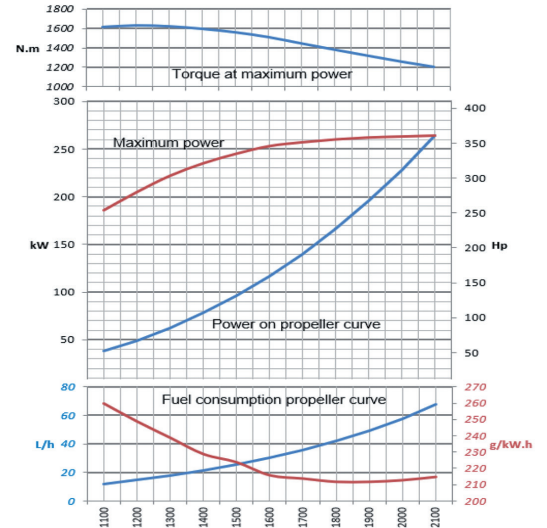

## Power definition

(Standard ISO 3046/1 - 1995 (F))

### Reference conditions

Ambient temperature	25°C / 77°F
Barometric pressure	100 kPa
Relative humidity	30%R
Raw water temperature	25°C / 77°F

### Fuel oil

Relative density	0,840 ± 0,005
Lower calorific power	42 700 kJ/kg
Consumption tolerances	+ 5%
	(DIN ISO 3046-1)
Inlet limit temperature	35°C / 95°F

**Our ratings also comply with classification societies maximum temperature definition without power derating.**

Ambient temperature	45°C / 113°F
Raw water temperature	32°C / 90°F