

SVI274FS | THREE-PHASE SYNCHRONOUS ALTERNATOR

Product Data Sheet

General Data

Ambient Temperature	40°C	Method of Cooling	Air cooling	
Temperature Rise	125°C	Direction of Rotation	Clockwise	
Insulation Class	H	Maximum Over-speed	2250r/min	
Power Factor	0.8	Degree of Protection / Enclosure	IP23	
Excitation	Brushless	Altitude	1000m	
Winding Pitch	2/3	Stator winding	Double Layer Lap	
Pole	4	Number of Terminal	12	
Duty	S1- Continuous	Rotor	With damping cage	
Waveform	TIF<50			THF<2%
RFI Suppression	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N			
Waveform distortion	Noload<1.5%,Non-distorting balanced linear load<5%			
AVR MODEL	Standard	Selection		PMG
	SX460	AS440	KRS440	MX341B MX321
Voltage Regulation - in steady state condition	±1.0	±1.0	±1.0	±0.5 ±0.5
Short Circuit Current Capacity	Control does not sustain a short circuit current			760A

Electrical Characteristic

Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125° C) temperature rise	kVA	150	150	150	N/A	165	173	173	185
	kW	120.0	120.0	120.0	N/A	132.0	138.4	138.4	148.0
Efficiency at Class H (P.F.=0.8)	4/4%	92	92.2	92.5	N/A	92.1	92.3	92.7	92.7
	3/4%	92.8	93	93.1	N/A	92.9	93	93.2	93.2
	2/4%	93.2	93.2	93.2	N/A	93.2	93.2	93.2	93.2
Efficiency at Class H (P.F.=1.0)	4/4%	93.7	94	94.1	N/A	93.8	94	94.2	94.2
	3/4%	94.4	94.6	94.7	N/A	94.4	94.6	94.7	94.8
	2/4%	94.8	94.8	94.8	N/A	94.8	94.8	94.8	94.9

Reactances (%) at Class H

Direct axis synchronous reactance unsaturated	Xd	2.29	2.065	1.92	N/A	2.605	2.44	2.23	2.205
Direct axis transient reactance saturated	X'd	0.2	0.18	0.17	N/A	0.23	0.215	0.195	0.195
Direct axis subtransient reactance saturated	X''d	0.135	0.125	0.115	N/A	0.155	0.145	0.135	0.13
Quadrature axis synchronous reactance unsaturated	Xq	1.455	1.315	1.22	N/A	1.635	1.53	1.4	1.385
Quadrature axis subtransient reactance saturated	X''q	0.175	0.155	0.145	N/A	0.21	0.2	0.18	0.175
Leakage reactance	Xl	0.075	0.07	0.065	N/A	0.09	0.08	0.08	0.08
Negative sequence reactance saturated	X2	0.15	0.135	0.125	N/A	0.175	0.165	0.15	0.15
Zero sequence reactance unsaturated	X0	0.09	0.085	0.075	N/A	0.105	0.095	0.09	0.09
Short-circuit ratio	Kcc	0.4367	0.4843	0.5208	N/A	0.3839	0.4098	0.4484	0.4535
Short-circuit transient time constant (sec.)	T'd	0.033							
Subtransient time constant (sec.)	T''d	0.01							
Open circuit time constant (sec.)	T'do	0.088							
Armature time constant (sec.)	Ta	0.008							
Stator Winding Resistance (20 °C) (Ra)	ohm	0.028							
Rotor Winding Resistance (20 °C) (Rf)	ohm	1.48							
Exciter Stator Resistance (20 °C)	ohm	20							
Exciter Rotor Phase resistance	ohm	0.091							
No load excitation current	io (A)	0.5	0.52	0.6	0.5	0.5	0.51	0.52	0.53
Full load excitation current	ic(A)	1.8	1.8	1.9	1.8	1.8	1.8	1.9	1.9
Cooling air requirement	m³ /sec	0.514m³/s 1090cfm				0.617m³/s 1308cfm			

Mechanical Characteristic

Configuration	Single Bearing		Double Bearing	
Type of Construction	B2-SAE		IM B34	
Total Weight - kgs	483		470	
Weight wound stator - kgs	185		185	
Weight wound rotor - kgs	170.5		160	
Inertia (J) [kgm²]	1.4014kgm²		1.3608kgm²	
Drive end bearing / Lubrication			BALL.6315-2RS(ISO)	
Non-drive end bearing / Lubrication	BALL.6310-2RS(ISO)		BALL.6310-2RS(ISO)	
Packing crate size (cm)	98X63X94		104X63X94	


SVI274FS | THREE-PHASE SYNCHRONOUS ALTERNATOR

Product Data Sheet

Ratings

Class Temp-Rise		Cont. F - 105/40 °C				Cont. H - 125/40 °C				Standby - 150/40 °C				Standby - 163/27 °C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	139.5	139.5	139.5	N/A	150	150	150	N/A	162	162	162	N/A	166.5	166.5	166.5	N/A
	kW	111.6	111.6	111.6	N/A	120	120	120	N/A	129.6	129.6	129.6	N/A	133.2	133.2	133.2	N/A
	Efficiency (%)	92.3	92.6	92.8	N/A	92	92.3	92.5	N/A	91.7	92.1	92.3	N/A	91.6	92	92.2	N/A
	kW Input	121	121	120	N/A	130	130	130	N/A	141	141	140	N/A	145	145	144	N/A

Three Phase Efficiency Curves

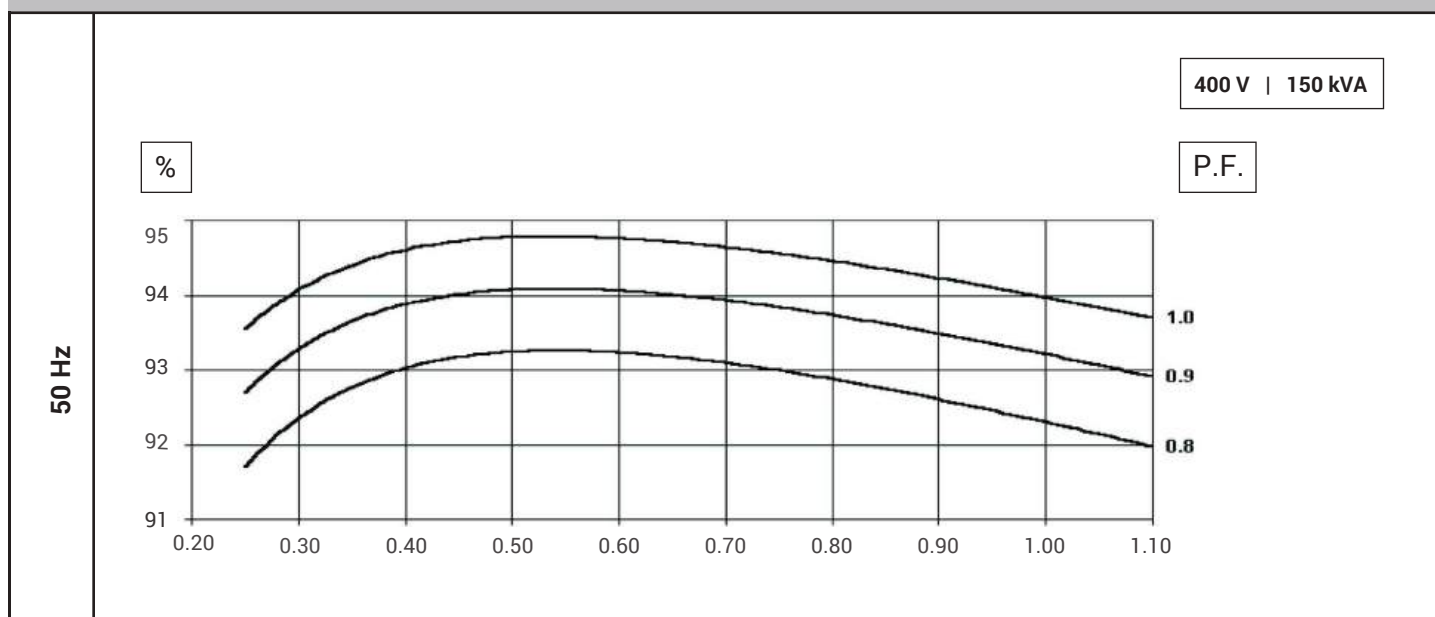

Dimensions

